



IECEX TEST REPORT COVER



ExTR Reference Number	CN/ CQM /ExTR17.0005/00	
ExTR Free Reference Number	CQM/CQST/ExTR17.0003	
Compiled by + signature (ExTL).....	Zhang Lixiao	<i>Zhang Lixiao</i>
Reviewed by + signature (ExTL).....	Wu Jianguo	<i>Wu Jianguo</i>
Reviewed by + signature (ExCB) ...	Mu Dayu	<i>Mu Dayu</i>
Approved by + signature (ExCB).....	Ji Xiaodong	<i>Ji Xiaodong</i>
Date of issue	2017-3-23	
Ex Testing Laboratory (ExTL)	China National Quality Supervision and Test Center for Explosion Protected Electrical Apparatus	
Address	No. 20 North Zhongjing Road, Nanyang, Henan, 473001P.R. China	
Ex Certification Body (ExCB)	China Quality Mark Certification Group Co., Ltd.	
Address	No.33 Zengguang Road, Hiadian District Beijing City, P.R China	
Applicant's name	Zhejiang Tormin Electrical Co., Ltd.	
Address	No. 35, Qingjiang Road, Technology Park, High-tech District, Wenzhou City, Zhejiang Province, China	
Standards associated with this ExTR package	IEC 60079-0:2011 IEC 60079-1:2014 IEC 60079-31:2013	
Clauses considered	All clauses considered	
Test procedure	IECEX System	
Test Report Form Number	ExTR Cover_4 (released 2010-12)	
Test item description	Explosion-proof Emergency Box	
Model/type reference.....	BXP01	
Code (e.g. Ex __ II__ T__).....	Ex db IIC T6 Gb, Ex tb IIIC T80°C Db	
Rating	Input voltage: 90~264V AC Input frequency: 50/60Hz Rated power: ≤40W	
All testing fully performed by ExTL staff at ExTL address above:	(Yes / No, See below for additional details.)	

Instructions for Intended Use of ExTR Cover:

An ExTR Cover is the sole top-level document to associate together all other parts of an IECEX Test Report (ExTR) package. An ExTR package is comprised of an ExTR Cover and one or more associated ExTR documents (which may include Ex Test Reports, ExTR Addendums and ExTR of National Differences). All ExTR package documents are compiled and reviewed by the ExTL. The Issuing ExCB indicates final approval of the overall ExTR package on this ExTR Cover.

Copyright © 2010 International Electrotechnical Commission System for Certification to Standards Relating to Equipment for use in Explosive Atmospheres (IECEX System), Geneva, Switzerland. All rights reserved.

This blank publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEX System is acknowledged as copyright owner and source of the material. The IECEX system takes no responsibility for, and will not assume liability for, damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Manufacturer's name.....: Zhejiang Tormin Electrical Co., Ltd.
 Address: No. 35, Qingjiang Road, Technology Park, High-tech District,
 Wenzhou City, Zhejiang Province, China
 Trademark: **TORMIN®**

Particulars: Test item vs. Test requirements

Classification of installation and use : Stationary
 Ingress protection : IP66
 Rated ambient temperature range (°C).....: -25°C ≤Ta≤ 55°C
 Rated service temperature range (°C) for Ex Components : --


General remarks:

The test results presented in this ExTR package relate only to the item or product tested.

- "(see Attachment #)" refers to additional information appended to the ExTR package.
- "(see appended table)" refers to a table appended to the ExTR package.
- Throughout this ExTR package, a point is used as the decimal separator.
- Where the term "N/A" appears in any part of an ExTR package, it indicates that the associated issue was considered "Not applicable" to the involved evaluation.
- In accordance with IECEx 02, a Receiving ExCB may request a sample of the Ex equipment and copies of the documentation referred to in an ExTR Cover.

The technical content of this ExTR package shall not be reproduced except in full without the written approval of the Issuing ExCB and ExTL.

Copy of Marking Plate:

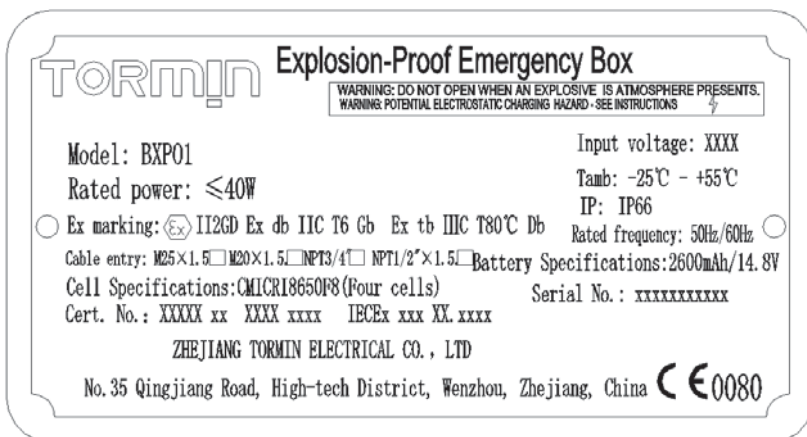

General product information:

1. This report covers the following types:
 Type: BXP01
 Input voltage: 90~264V AC,
 Rated voltage: 110V AC, 120V AC, 127V AC, 220V AC, 230V AC, 240V AC,
 Rated frequency: 50/60Hz, Rate power: max 40W,
 Batteries specifications: 2600mAh, 14.8V,
 Cell: type CMICR18650F, 2600mAh, Nominal voltage: 3.7V.
 Model definition:

BXP 01

